


125 X 125 X 1500, BLACK REPLAS PLASTIC, OR CYPRESS PINE, SQUARE BOLLARDS. PYRAMID TOP, SET 1M HIGH.

FORM 1:10 SLOPE TO TOP OF FOOTING WITH THE TOP OF FOOTING 50MM BELOW FINISHED SURFACE LEVEL WHEN IN GRASS OR GARDEN BED AREAS

350 X 350 X 600MM DEEP N25 CONCRETE FOOTING EXTENDING MIN. 100MM ALL AROUND BOLLARD

ELEVATION

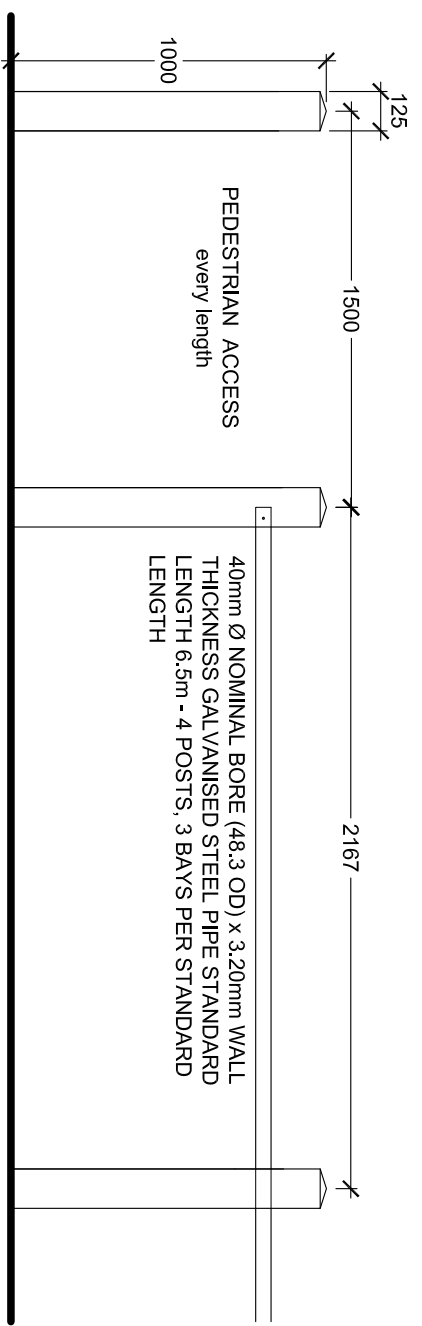

PEDESTRIAN ACCESS every length

40mm Ø NOMINAL BORE (48.3 OD) x 3.20mm WALL THICKNESS GALVANISED STEEL PIPE STANDARD LENGTH 6.5m - 4 POSTS, 3 BAYS PER STANDARD LENGTH

MULCHED SURFACE

PIPE FIXED TO EACH PLASTIC END POST WITH ONE M10 X 50mm CADMIUM PLATED BUGLE HEAD, POZIDRIV, SELF TAPPING SCREW. END POST HALF BORE ONLY.

ASPHALT ROAD EDGE

PLAN VIEW



SECTION

Drawing Title:
Fence - Post & Rail

Scale at A4: NTS
Yarra Standard: YSD1035

REV	DATE	DRAWN BY
A	06/09/02	
B	25/10/18	KA

