





(SVC CODE :- 15.375)
OR CHARCOAL COLOUR FITZROY
LINTEL FOR 300 KERB STONES
(SVC CODE: 15.242)

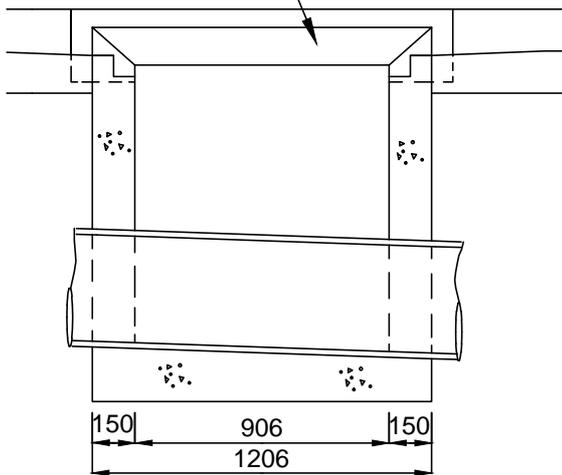

SECTION A-A

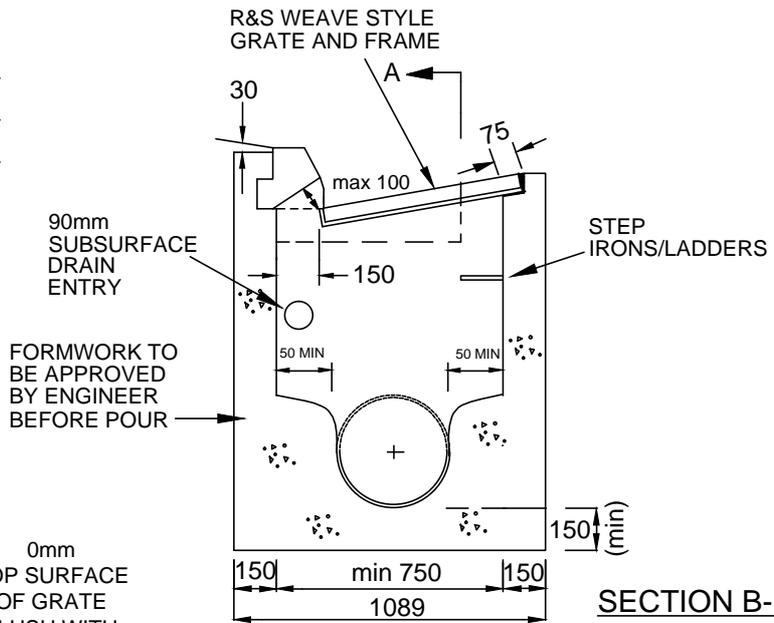

SECTION B-B

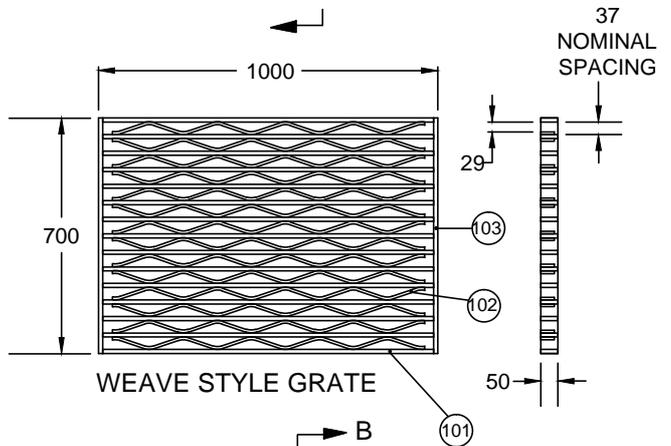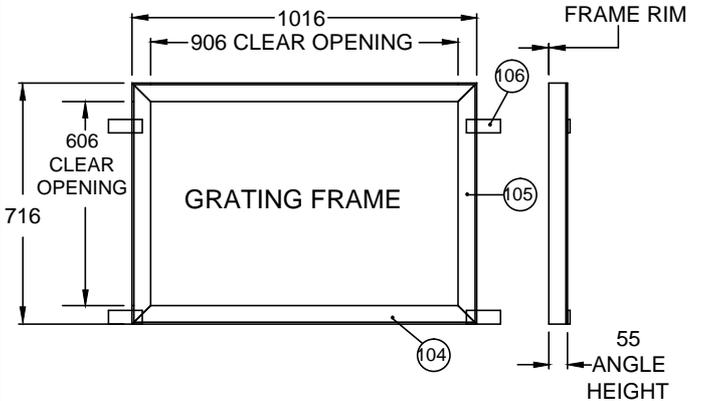


CLASS "D" LOAD RATING GRATE				
ITEM	SIZE	DESCRIPTION	LENGTH	QTY
101	50X12	HOT ROLLED FLAT	976	15
102	40X8	HOT ROLLED FLAT - WEAVE TO 920 LONG	970	14
103	50X12	HOT ROLLED FLAT	700	2
104	55X55X5	HOT ROLLED ANGLE - TRIMMED 45° EACH END	1016	2
105	55X55X5	HOT ROLLED ANGLE - TRIMMED 45° EACH END	716	2
106	40X8	HOT ROLLED FLAT	100	4

* ALL WELDS TO BE OF HIGH QUALITY WITH NO SPLATTER.

GENERAL NOTES

- ALL CONCRETE SHALL BE F'c 25MPa AT 28 DAYS.
- PITS DEEPER THAN 750mm SHALL BE FITTED WITH GALVANISED STEP IRONS (@ 300mm C.T.S) REFER TO YSD 212.
- CONCRETE TO BE VIBRATED IN PITS TO ENGINEER'S SATISFACTION.
- CONCRETE TO BE Poured INTO PITS DIRECTLY OUT OF SUPPLY VEHICLES.
- BEDDING MATERIAL SHALL BE 100mm COMPACTED THICKNESS OF CLASS 2 C.R.
- F72 REINFORCEMENT IN WALLS OVER 2m DEEP.
- GRATE PERPENDICULAR TO KERB AND CHANNEL.
- ALL LINTELS TO BE CHARCOAL COLOUR.
- ALL PIT SURROUNDS TO BE CHARCOAL COLOUR.
- CITY OF YARRA STANDARD WEAVE GRATE & FRAME TO SUIT 900*600 PIT SIZE, IS AVAILABLE FROM R&S GRATING AT sales@grating.com.au. EQUAL ALTERNATIVE PRODUCTS MAY ALSO BE CONSIDERED BY COUNCIL'S ENGINEER.
- INTERNAL PIT DIMENSIONS TO BE ADJUSTED TO ADEQUATELY BED THE PIT COVER FRAME AS PER SECTION B-B.

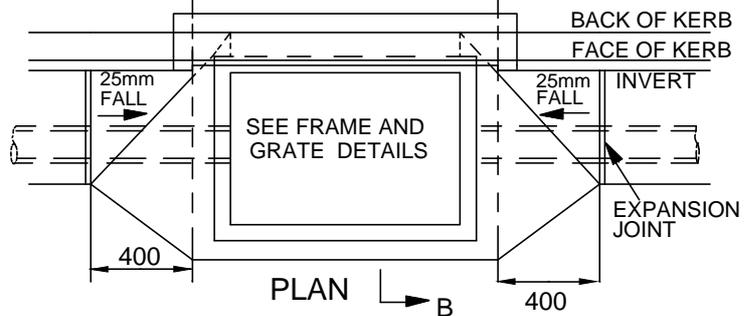

NOTE:
THIS DRAWING IS TO BE USED ONLY WITH SPECIFIC APPROVAL FROM MANGAGER ENGINEERING & TRAFFIC.

Yarra Standard: YSD206
Drawing Title:
SIDE ENTRY PIT WITH GRATE (G.S.E.P)

Scale at A4 N.T.S

REV	DATE	DRAWN BY
A	30/04/12	DKC
B	11/09/15	HL
C	26/10/17	HL

