




SECTION A-A

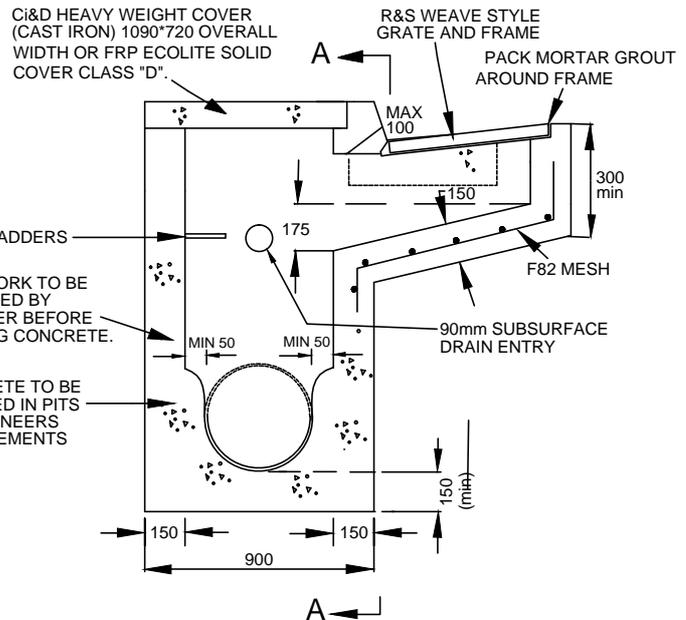


SECTION B-B

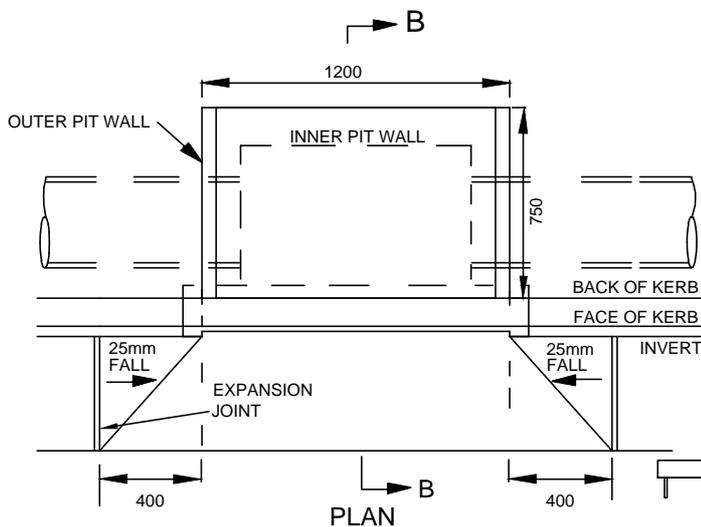


PLAN

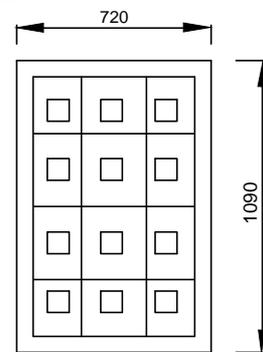

HEAVY WEIGHT COVER Ci&D PRODUCT No.MH69H OR FRP ECOLITE SOLID COVER CLASS "D".

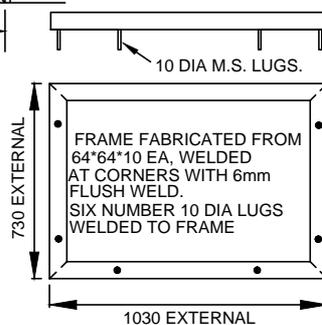

GRATING FRAME

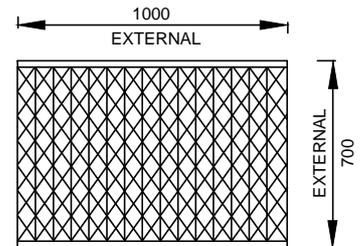

WEAVE STYLE GRATE

CLASS "D" LOAD RATING GRATE MATERIAL

- * Straight bars 50*12 bars Qty 17
- * Weave bars 40*10 bars Qty 16
- * End bars 50*25 bars Qty 2

GENERAL NOTES

1. ALL CONCRETE SHALL BE F'c 25MPa AT 28 DAYS.
2. PITS DEEPER THAN 750mm SHALL BE FITTED WITH GALVANISED STEP IRONS (@ 300mm C.T.S) REFER TO DRAWING YSD212 FOR DETAILS.
3. THE FLOOR OF THE PIT SHALL BE FORMED UP TO AT LEAST THE OVERT OF PIPE.
4. CONCRETE TO BE VIBRATED IN PITS TO ENGINEER'S SATISFACTION.
5. CONCRETE TO BE POURED INTO PITS DIRECTLY OUT OF SUPPLY VEHICLES.
6. BEDDING MATERIAL SHALL BE 100mm COMPACTED THICKNESS OF CLASS 2 C.R.
7. F72 REINFORCEMENT IN WALLS OVER 2m DEEP.
8. GRATE PERPENDICULAR TO KERB AND CHANNEL.
9. ALL LINTELS TO BE CHARCOAL COLOUR.
10. ALL PIT SURROUNDS TO BE CHARCOAL COLOUR.
11. FOR GRATED PIT IN BLUESTONE CHANNEL, NO CONCRETE APRON.

NOTE:
THIS DRAWING IS TO BE USED ONLY WITH SPECIFIC APPROVAL FROM MANGAGER ENGINEERING & TRAFFIC.

Yarra Standard: YSD208
Drawing Title:

CORBELLED SIDE ENTRY PIT WITH GRATE (PIPE BEHIND KERB)

Scale at A4 N.T.S

REV	DATE	DRAWN BY
A	30/04/12	DKC
B	23/10/17	HL

