



SHERBROOKE PRECAST R.C. LINTEL
(SVC CODE :- 15.375)
OR CHARCOAL COLOUR FITZROY
LINTEL FOR 300 KERB STONES
(SVC CODE: 15.242)

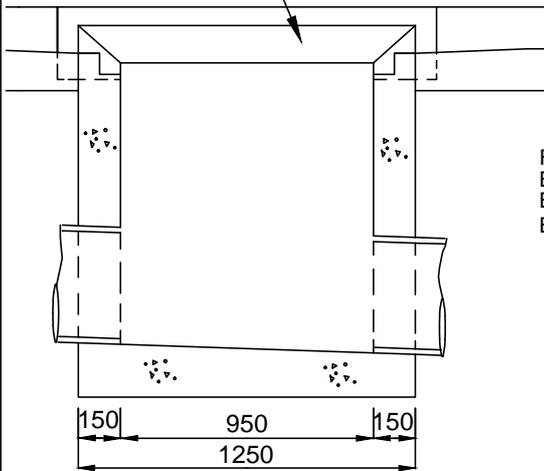


SECTION A-A

FRP ECOLITE SOLID COVER
CLASS "D"


FORMWORK TO
BE APPROVED BY
ENGINEER
BEFORE POUR

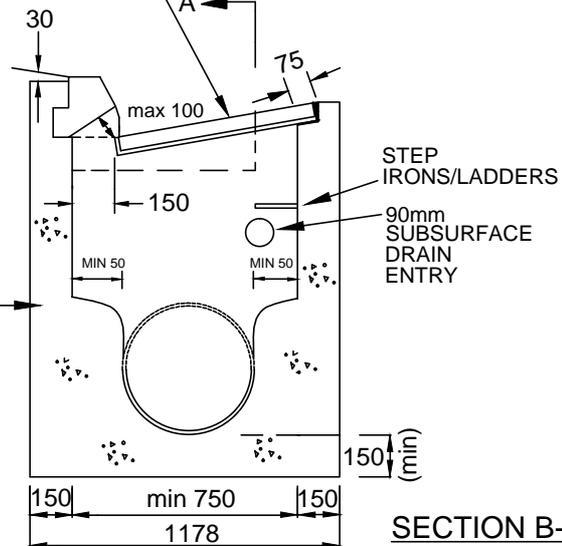


SECTION B-B

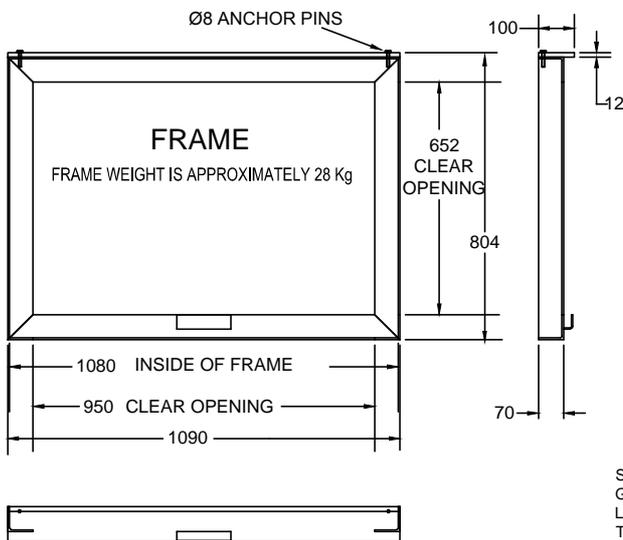

SLIP RESISTANT TO R-13
(SLIP RESISTANCE ASSESSMENT GROUP)
OF AS/NZS4586 - 2004

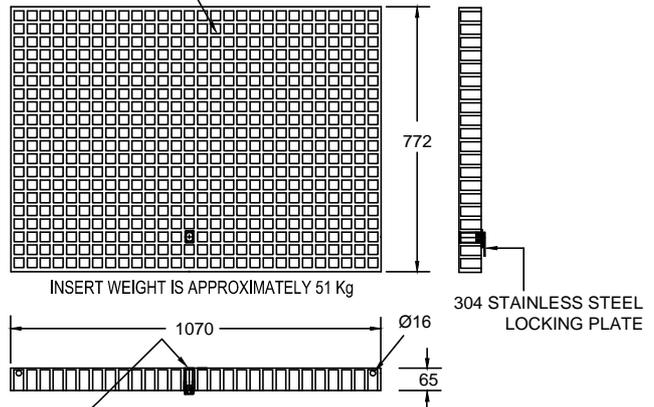

STANDARD EXISTING
GATIC ACCESS COVER
LIFTERS CAN BE USED
TO UNLOCK THE LID

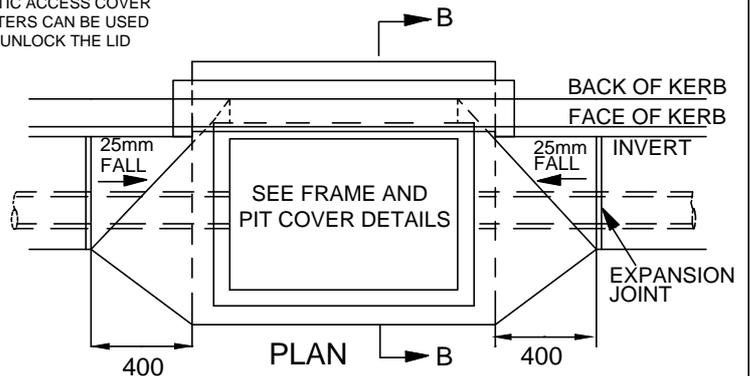


Yarra Standard: YSD213
Drawing Title:

SIDE ENTRY PIT WITH FRP ECOLITE
SOLID COVER

Scale at A4 N.T.S

REV	DATE	DRAWN BY
A	23/10/17	HL



GENERAL NOTES

1. ALL CONCRETE SHALL BE F'c 25MPa AT 28 DAYS.
2. PITS DEEPER THAN 750mm SHALL BE FITTED WITH GALVANISED STEP IRONS (@ 300mm C.T.S) REFER TO YSD 212.
3. CONCRETE TO BE VIBRATED IN PITS TO ENGINEER'S SATISFACTION.
4. CONCRETE TO BE POURED INTO PITS DIRECTLY OUT OF SUPPLY VEHICLES.
5. BEDDING MATERIAL SHALL BE 100mm COMPACTED THICKNESS OF CLASS 2 C.R.
6. F72 REINFORCEMENT IN WALLS OVER 2.0m DEEP.
7. ALL LINTELS TO BE CHARCOAL COLOUR.
8. SIDE ENTRY THROAT OPENING MUST BE Max 100mm.
9. ALL PIT SURROUNDS TO BE CHARCOAL COLOUR.
10. FIBRE REINFORCED PIT COVER (ECOLITE) GREY-CLASS D (Highway loading) 900*600 CLEAR OPENING, - IS AVAILABLE FROM R&S GRATING AT sales@grating.com.au. EQUAL ALTERNATIVE PRODUCTS MAY ALSO BE CONSIDERED BY COUNCIL'S ENGINEER.
11. INTERNAL PIT DIMENSIONS TO BE ADJUSTED TO ADEQUATELY BED THE PIT COVER FRAME AS PER SECTION B-B.