

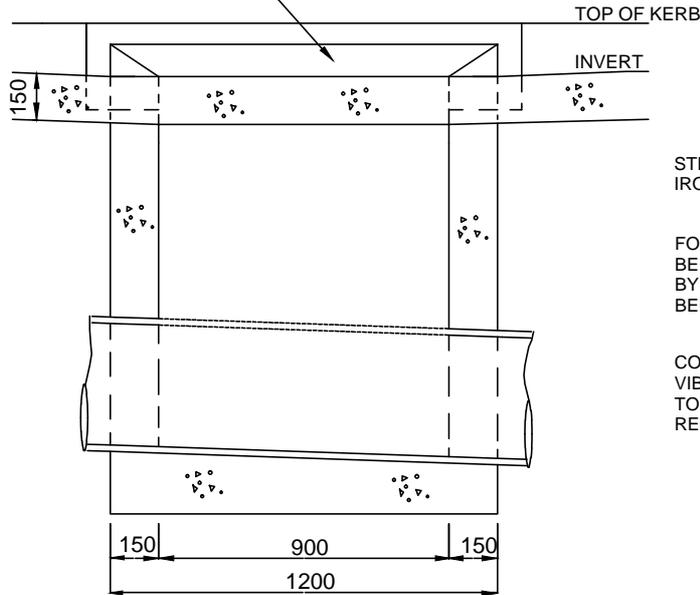


SHERBROOKE PRECAST R.C. LINTEL
CHARCOAL COLOUR (SVC CODE :- 15.375)
OR CHARCOAL COLOUR FITZROY
LINTEL FOR 300 KERB STONES
(SVC CODE: 15.242)

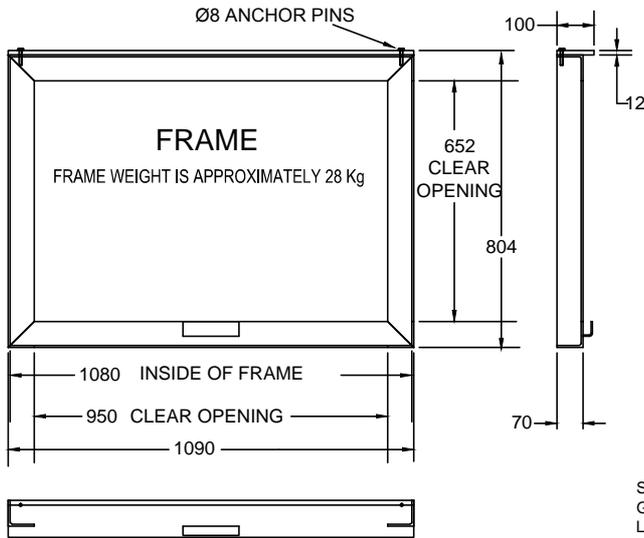


SECTION A-A

FRP - CLASS D LOADING FOR
FRAME AND SOLID COVER

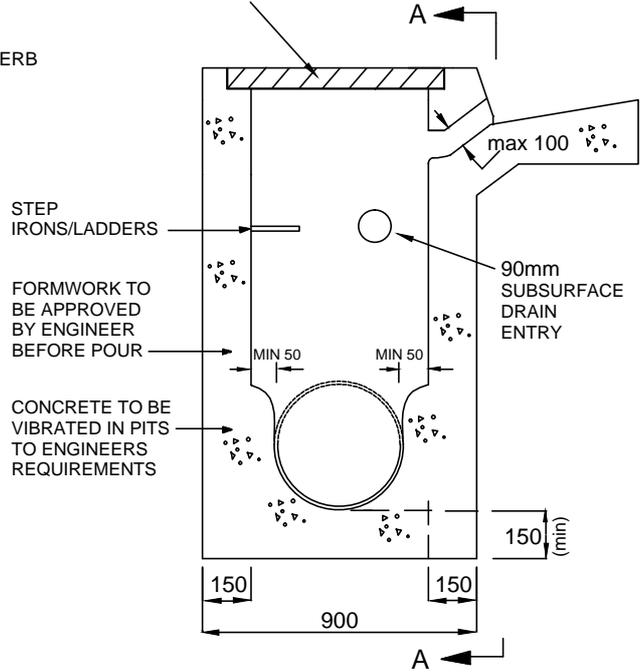

SLIP RESISTANT TO R-13
(SLIP RESISTANCE ASSESSMENT GROUP)
OF AS/NZS4586 - 2004

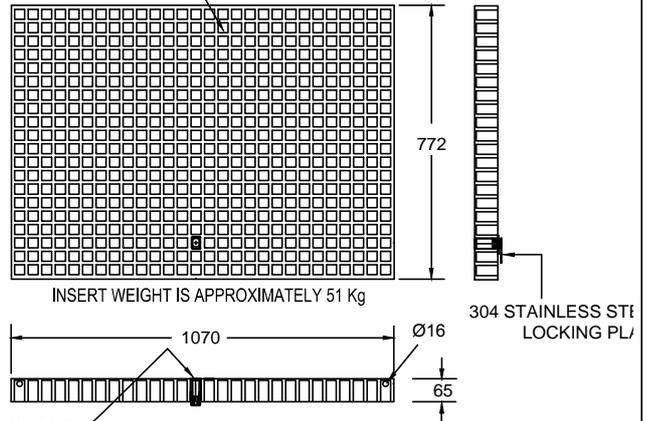

GENERAL NOTES

1. ALL CONCRETE SHALL BE F_c 25MPa AT 28 DAYS.
2. PITS DEEPER THAN 750mm SHALL BE FITTED WITH GALVANISED STEP IRONS (@ 300mm C.T.S) REFER TO DRAWING YSD212 FOR DETAILS.
3. CONCRETE TO BE VIBRATED IN PITS TO ENGINEER'S SATISFACTORY.
4. CONCRETE TO BE POURED INTO PITS DIRECTLY OUT OF SUPPLY VEHICLES.
5. BEDDING MATERIAL SHALL BE 100mm COMPACTED THICKNESS OF CLASS 2 C.R.
6. F72 REINFORCEMENT IN WALLS OVER 2m DEEP.
7. PIT COVER PERPENDICULAR TO KERB AND CHANNEL.
8. ALL LINTELS AND PIT SURROUNDS TO BE CHARCOAL COLOUR.
9. FIBREGLASS REINFORCED PLASTIC (FRP) PIT COVER (ECOLITE) GREY - CLASS D (Highway loading) 900*600 CLEAR OPENING - IS AVAILABLE FROM R&S GRATING AT sales@grating.com.au. EQUAL ALTERNATIVE PRODUCTS MAY ALSO BE CONSIDERED BY COUNCIL'S ENGINEER.
10. INTERNAL PIT DIMENSIONS TO BE ADJUSTED TO ADEQUATELY BED THE PIT COVER FRAME.

**Yarra Standard: YSD214
Drawing Title:**

SIDE ENTRY PIT WITH FRP ECOLITE
SOLID COVER (BEHIND KERB)

Scale at A4 N.T.S

REV	DATE	DRAWN BY
A	05/09/16	HL
B	26/10/17	HL

