

SHERBROOKE  
 PRECAST R.C LINTEL  
 CHARCOAL COLOUR  
 (SVC CODE: 15.375)  
 FITZROY LINTEL FOR  
 300 KERB STONES  
 (SVC CODE: 15.424)

FRP ECOLITE SOLID COVER  
 CLASS "D"

PACK MORTAR OR GROUT  
 AROUND FRAME



**GENERAL NOTES**

1. ALL CONCRETE SHALL BE F'c 25MPa AT 28 DAYS.
2. PITS DEEPER THAN 750mm SHALL BE FITTED WITH GALVANISED STEP IRONS (@ 300mm C.T.S) REFER TO YSD 212.
3. ALL STEELWORK SHALL BE HOT DIPPED GALVANISED.
4. THE FLOOR OF THE PIT SHALL BE FORMED UP TO AT LEAST THE OVERT OF PIPE.
5. ALL DIMENSIONS IN MILLIMETRES.
6. CONCRETE TO BE VIBRATED IN PITS TO ENGINEER'S SATISFACTION.
7. CONCRETE TO BE POURED INTO PITS DIRECTLY OUT OF SUPPLY VEHICLES.
8. F72 REINFORCEMENT IN WALLS OVER 2m DEEP.
9. FIBRE REINFORCED COVER (ECOLITE) GREY-CLASS D (Highway loading) 900X600 CLEAR OPENING - IS AVAILABLE FROM R&S GRATING AT sales@grating.com.au. EQUAL ALTERNATIVE PRODUCTS MAY ALSO BE CONSIDERED BY COUNCIL'S ENGINEER.


STEP  
 IRONS/LADDERS  
 REFER YSD205

FORMWORK TO BE  
 APPROVED BY  
 ENGINEER BEFORE  
 POUR

90mm  
 SUBSURFACE  
 DRAIN ENTRY

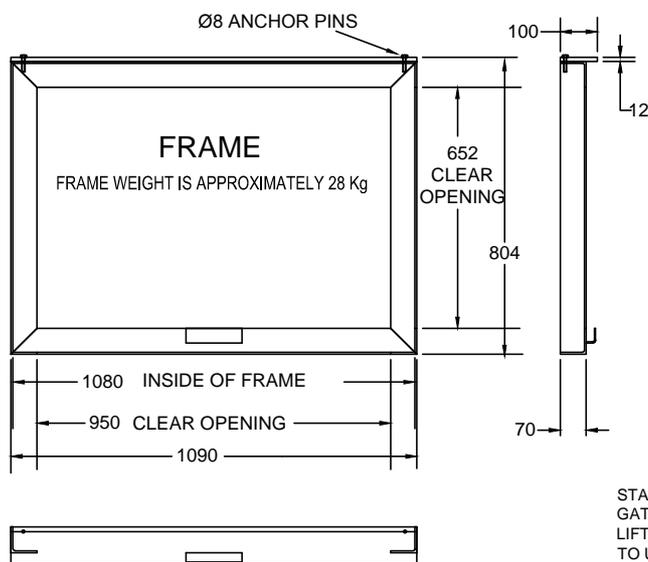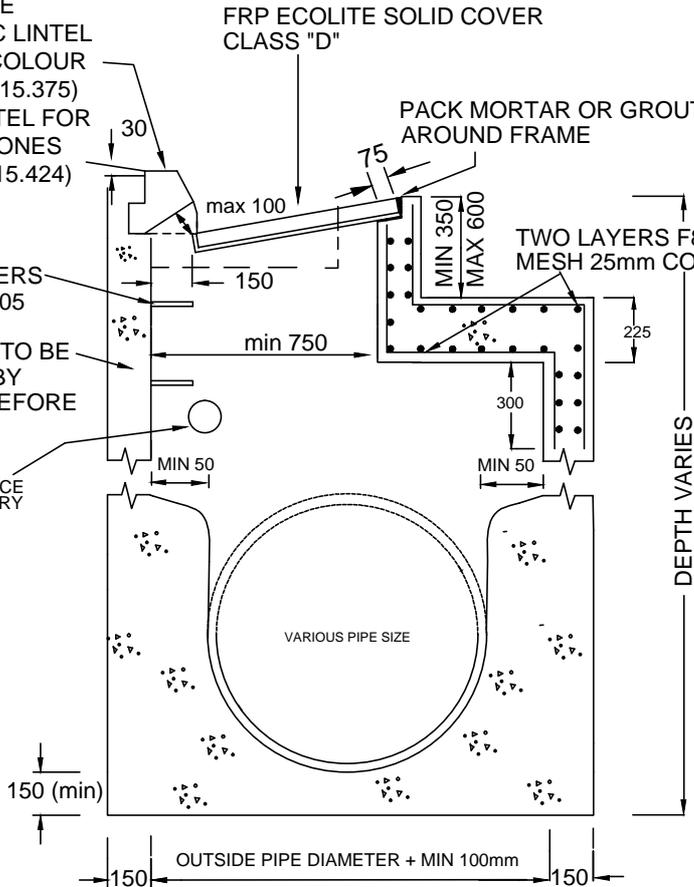

SLIP RESISTANT TO R-13  
 (SLIP RESISTANCE ASSESSMENT GROUP)  
 OF AS/NZS4586 - 2004

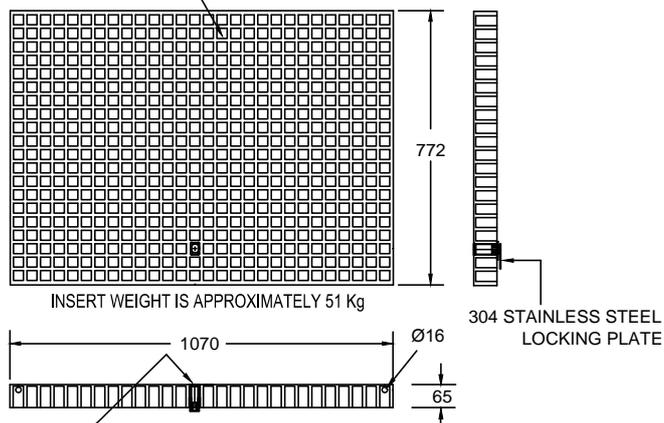

STANDARD EXISTING  
 GATIC ACCESS COVER  
 LIFTERS CAN BE USED  
 TO UNLOCK THE LID

**Yarra Standard: YSD215**  
**Drawing Title:**  
 HAUNCHED SIDE ENTRY PIT  
 WITH FRP ECOLITE SOLID COVER

Scale at A4 N.T.S

REV	DATE	DRAWN BY
A	26/10/17	HL

