


EXCAVATE EXISTING SURFACE TO MIN. 150mm BELOW FINISHED SURFACE LEVELS AND CONSTRUCT CONCRETE PATHWAY WITH:

- 100mm THICK N25 REINFORCED CONCRETE SLAB (F42 PLACED CENTRALLY)
- 50mm OF COMPACTED CRUSHED ROCK (CLASS 2)
- BUILD UP WITH APPROVED COMPACTED SUBSOIL ( WHERE NECESSARY)

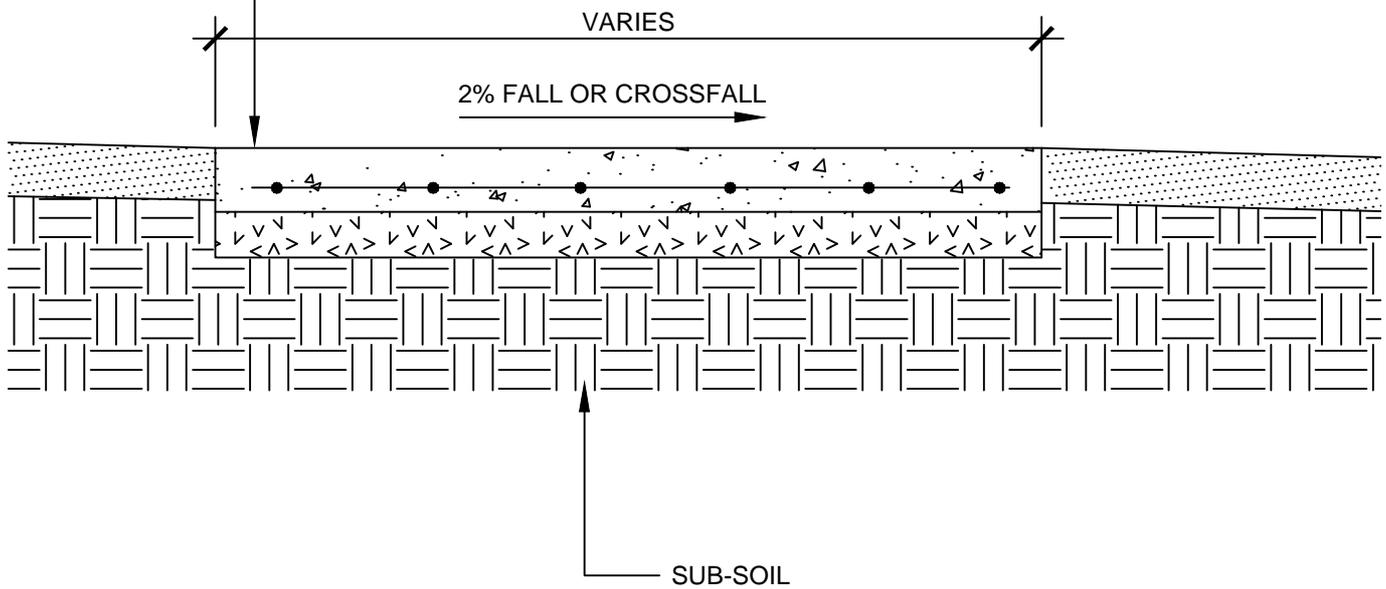

Yarra Standard: YSD513

Drawing Title:

Concrete Path - Pedestrian

Scale at A4 1: 10

REV	DATE	DRAWN BY
A	06/09/02	
B	30/04/12	DKC

