

Road Management Plan 2025

Adopted 14 Oct 2025
In effect 1 Nov 2025



Yarra City Council acknowledges the Wurundjeri Woi Wurrung people as the Traditional Owners and true sovereigns of the land now known as Yarra. We also acknowledge the significant contributions made by other Aboriginal and Torres Strait Islander people to life in Yarra. We pay our respects to Elders from all nations and to their Elders past, present and future.

Contents

1	Introduction.....	8
1.1	What is the purpose of this Plan	8
1.2	Legislation guiding this Plan	8
1.3	What is covered in this Plan?	8
1.4	Updating the Plan.....	8
1.5	Exceptional Circumstances	9
1.5.1	Suspension of the Plan.....	9
1.5.2	Reinstatement of the Plan.....	9
1.5.3	Communication and documentation around Plan suspension.....	9
1.5.4	Inspections and repairs during suspension of Plan	10
1.6	Responsibility for the Plan	10
2	Rights and Responsibilities.....	11
2.1	Public Roads	11
2.2	Key stakeholders.....	11
2.3	Coordinating & Responsible Road Authority.....	11
2.4	General Functions of a Road Authority.....	11
2.5	Rights of the Road User	12
2.6	Obligations of Road Users.....	12
2.6.1	General Usage	12
2.6.2	Incident Claims	12
2.6.3	Permits for work within a road reserve	12
2.6.4	Obligation of others.....	12
3	Road Management Systems.....	15
3.1	Background and Process	15
3.2	Asset Hierarchies – Municipal Road Network	15
3.3	Our Road Network.....	16
3.4	Maintenance Management System	16
3.4.1	Maintenance Management	16
3.4.2	Asset Management Plans	17
3.4.3	Maintenance Surveys and inspections.....	17
3.4.4	Maintenance responsiveness and performance targets	17
3.5	Asset Levels of Service	18
4	Register of Public Roads.....	19
4.1	Maintenance Demarcation (Boundary) Agreements	19
4.1.1	Metro Trains Melbourne.....	19
4.1.2	Freeways and Arterial Roads.....	19
4.1.3	Local Roads with Tram Lines.....	19
4.1.4	Shared Roads.....	19
4.1.5	Bridges & Major Culverts	19
4.2	Roads not listed on the Register.....	20
Attachment 1: Hierarchy – Roads & Bicycle Lanes		21
Road Hierarchy		21

Shared Zones Hierarchy.....	22
Bicycle Lane Hierarchy.....	22
Attachment 2: Road Hierarchy – Rural Roads.....	23
Attachment 3: Pathway Hierarchy	24
Footpath Hierarchy.....	24
Attachment 4: Inspection Requirements.....	25
Attachment 5: Inspection Schedules	26
Attachment 6: Defect Intervention Levels and Repair Timeframes	27
Sealed Roads.....	27
Traffic Control Devices	28
Shared Zones.....	29
Bicycle Lanes	31
Kerb and Channel	32
Footpaths	33

Document control

Responsible Department:	Asset Management & Capital Works
Adopted by:	Council
Date of Adoption:	14 October 2025
Effective date:	1 November 2025
Content Manager ID	
Review Date:	31 October 2029
Version:	6.1.0

Review History 2013 to 2025

Rev number	Date	Version/Changes
1.0.0	Aug 2004	First Edition
2.0.0	Jul 2009	Second Edition
3.0.0	25 Jul 2013	RMP Review as per s54(5) of Road Management Act 2004
3.0.1	11 Jul 2013	Initial draft issued for public comment
3.0.2	17 Sep 2013	RMP 2013 adopted by Council
4.0.0	15 Mar 2017	RMP Review as per s54(5) of Road Management Act 2004
4.0.1	2 May 2017	Initial draft issued for public comment
4.0.2	4 Jul 2017	RMP 2017 - 2021 adopted by Council
5.0.0	18 Mar 2021	RMP Review as per s54(5) of Road Management Act 2004
5.0.1	20 Apr 2021	Draft RMP 2021 issued for Public Comment
5.0.2	7 Jul 2021	RMP 2021 for adoption by Council
5.0.3	20 Jul 2021	RMP adopted by Council
6.0.0	17 Apr 2025	RMP Review as per s54(5) of Road Management Act 2004 Recommended Changes: <ul style="list-style-type: none"> Aligning with best practice provided by Municipal Association of Victoria Reviewed intervention and inspection timeframes and levels
6.0.1	23 Jun 2025	Draft RMP 2025 issued for Public Comment
6.0.2	14 Oct 2025	RMP adopted by Council

Definitions

Arterial Road	Refers to freeways, highways and declared main roads, which are managed by the Victorian Government, through Head of Transport for Victoria (as the co-ordinating road authority).
Co-ordinating road authority	The organisation which has the responsibility to co-ordinate works. Generally, if the road is a freeway or arterial road, this will be Head of Transport for Victoria. Generally, if the road is a municipal road, this will be Council.
Council	Refers to the City of Yara
Demarcation agreement	A formal agreement between Council and another organisation that defines areas of responsibility.
Motor vehicle	Refers to a vehicle that is propelled by an in-built motor and is intended to be used on a roadway. This does not include a motorised wheelchair or mobility scooter which is incapable of travelling at a speed greater than 10 km/h and is solely used for the conveyance of an injured or disabled person.
Municipal road(s)	Road for which the municipal council is the co-ordinating road authority. The <i>Road Management Act 2004</i> imposes specific duties on the municipal council with respect to the inspection, repair and maintenance of these roads and associated road-related infrastructure.
Non-road infrastructure	Refers to infrastructure in, on, under or over a road, which is not road infrastructure. This includes (but is not limited to) such items as gas pipes, water and sewerage pipes, cables, electricity poles and cables, tram wires, rail infrastructure, bus shelters, public telephones, mailboxes, roadside furniture and fences erected by utilities, or providers of public transport.
Other roads	Include roads in state forests and reserves, and roads on private property. Municipal councils are not responsible for the inspection, repair or maintenance of these roads.
Pathway	<p>Refers to a footpath, bicycle path, shared path or other area that is constructed or developed by Council for members of the public (not motor vehicles) to use.</p> <p>Pathways may be further categorised as:</p> <ul style="list-style-type: none"> • Footpaths – pathways designated solely for use by foot traffic (and limited mobility devices such as wheelchair users) • Bicycle pathways – pathways designated solely for use by cyclists, scooters and the like but excluding foot traffic, and • Shared pathways – pathways designated for use by riders of bicycles, the riders of electric scooters and pedestrians.
Public Road	As defined by the <i>Road Management Act 2004</i> and includes a freeway, an arterial road, a municipal road declared under section 14(1) of the Act and a road in respect of which Council has made a decision that it is reasonably required for general public use and is included on the Register of Public Roads.
Plan	Refers to this Road Management Plan.

Road	Has the same meaning as in the <i>Road Management Act 2004</i> , being inclusive of any public highway, any ancillary area and any land declared to be a road under section 11 of that Act or forming part of a public highway or ancillary area.
Road infrastructure	Refers to infrastructure which forms part of a roadway, pathway or shoulder, which includes structures and materials.
Road-related infrastructure	Refers to infrastructure installed or constructed by the relevant road authority to either facilitate the operation or use of the roadway or pathway, or support or protect the roadway or pathway.
Road Reserve	Refers to the area of land that is within the boundaries of a road.
Roadside	Refers to any land that is within the boundaries of the road (other than shoulders) which is not a roadway or pathway. This includes land on which any vehicle crossing or pathway, which connects from a roadway or pathway on a road to other land, has been constructed. Example: any nature strip, forest, bushland, grassland or landscaped area within the road reserve would be considered roadside.
Roadway	Refers to the area of a public road that is open to, or used by, the public, and has been developed by a road authority for the driving or riding of motor vehicles. This does not include a driveway providing access to a public road, or other road, from adjoining land.
Shoulder	Refers to the cleared area, whether constructed or not, that adjoins a roadway to provide clearance between the roadway and roadside. This does not refer to any area that is not in the road reserve.

1 Introduction

1.1 What is the purpose of this Plan

Section 50 of the *Road Management Act 2004* sets the following objectives for a municipal road management plan:

- 1) To establish a system for our road management functions, which is based on policy, operational objectives and available resources.
- 2) To set a performance standard for our road management functions.

Although it is termed a 'plan' in the legislation, it is functionally an operational protocol document – describing the systems and rules we use to make decisions and meet obligations within our available resources. The plan forms part of a larger Asset Management Framework related to maintenance and operations.

For the avoidance of doubt, this Plan is a road management plan for the purposes of s.39 of the *Road Management Act 2004*.

1.2 Legislation guiding this Plan

In addition to the *Road Management Act 2004*, the plan also considers the following Acts, regulations and codes of practice:

- *Local Government Act 2020*
- Ministerial Codes of Practice
- *Road Management (General) Regulations 2016*
- *Road Management (Works and Infrastructure) Regulations 2015*
- *Road Safety Act 1986*
- *Wrongs Act 1958*.

1.3 What is covered in this Plan?

The Plan is divided into six sections:

1. Introduction.
2. Rights and Responsibilities – covers legislation and local laws relevant to road management.
3. Road Management Systems - how we classify roads, streets and footpaths – known as our asset hierarchy – and the plans and processes we use to maintain roads and road-related infrastructure.
4. Register of Public Roads – what's in it, how to access it and the process for making changes.
5. Technical References.
6. Attachments:
 - a. Attachment 1, Road Hierarchy – Urban Roads
 - b. Attachment 2, Road Hierarchy – Rural Roads
 - c. Attachment 3, Pathway Hierarchy
 - d. Attachment 4, Inspection Requirements
 - e. Attachment 5, Inspection Frequencies
 - f. Attachment 6, Defect Intervention Levels and Repair Timeframes

1.4 Updating the Plan

This Plan must be updated within a set period following a Council election. Outside of this cycle, changes may be required from time to time.

The following process will be used to manage these changes:

- If material changes are made to standards and specifications, a report will be presented to Council, along with a brief explanation as to why such changes are necessary. The review process must follow the steps as set out in *the Road Management (General) Regulations 2016* Part 3 – Road Management Plans.
- When changes do not alter these technical aspects of road management, changes will be approved by the General Manager Infrastructure & Environment.

These changes will be made in accordance with the processes prescribed by the *Road Management Act 2004*. To assist with version control, these changes will be numbered as follows:

- Versions presented to Council will be renumbered by whole numbers – for example, from Version 1.0.0 to 2.0.0.
- Those approved by the General Manager will be renumbered by decimals – for example, from Version 1.0.0 to 1.1.0
- For clarity, where draft versions of the document are produced (e.g. for public consultation) these will be number by second decimal point – for example, from Version 1.0.0 to 1.0.1

1.5 Exceptional Circumstances

Council will make every effort to meet its commitments under this Plan.

However, there may be situations or circumstances that affect Council's business activities to the extent that it cannot deliver on the service levels of the Plan. These include but are not limited to: natural disasters, such as fires, floods, or storms, or a prolonged labour or resource shortage, due to a need to commit or redeploy Council staff and/or equipment elsewhere or due to the effects of pandemic and or government intervention.

1.5.1 Suspension of the Plan

In the event that the Chief Executive Officer (CEO) of Council has considered the impact of such an event on the limited financial resources of Council and its other conflicting priorities, and determined that the Plan cannot be met, then pursuant to Section 83 of the *Wrongs Act 1958*, the CEO will write to Council's Officer in charge of the Plan and inform them that some, or all, of the timeframes and responses in Council's Plan are to be suspended.

1.5.2 Reinstatement of the Plan

Once the scope of the event/s have been determined, and the resources committed to the event response have been identified, then there will be an ongoing consultation between Council's CEO and Council's Officer responsible for the Plan, to determine which parts of Council's Plan are to be reactivated and when.

1.5.3 Communication and documentation around Plan suspension

Council will provide information/statements to residents about the suspension or reduction of the services under its Plan, including:

- How the work that will be done has been prioritised; and
- The period for which it is likely to be affected.

This information will be provided by the Council on its website where its Plan is located and other channels as appropriate such as press releases or social media.

Where Council has suspended, in part or whole, its Plan, associated documents (e.g. communications, meeting minutes, schedules, etc.) will be recorded and stored.

1.5.4 Inspections and repairs during suspension of Plan

The suspension of the Plan will not necessarily mean that all inspections and repairs halt. However, it may mean that only certain categories of inspections and repairs are undertaken. These will be based on a risk assessment and resources available to the Council, taking into account the resources needed to address the impact of the trigger event. For example, some reactive inspections may take place and repair (temporary or permanent) of roads/footpaths which pose a high risk may be undertaken, depending on the resources available to the council and the accessibility of each asset.

1.6 Responsibility for the Plan

Overall responsibility for administering and implementing the Plan rests with the General Manager Infrastructure and Environment

2 Rights and Responsibilities

2.1 Public Roads

Public roads are defined in the *Road Management Act 2004* as including:

- a freeway
- an arterial road
- a road declared under section 204(1) of the *Local Government Act 1989*
- a municipal road declared under section 14(1) of the *Road Management Act 2004*
- a road in respect of which Council has made a decision that it is reasonably required for general public use and is included on the Register of Public Roads.

2.2 Key stakeholders

The key stakeholders impacted by this Plan include:

- the general community (for recreation, sport, leisure and business)
- residents and businesses adjoining the road network
- pedestrians
- vehicle users with motorised vehicles, such as trucks, buses, commercial vehicles, cars and motorcycles
- users of smaller, lightweight vehicles, such as pedal-powered bicycles, motorised buggies, wheelchairs, prams and so on
- tourists and visitors to the area
- emergency agencies (Victoria Police, Country Fire Authority, Ambulance Victoria, State Emergency Services)
- the military (in times of conflict and emergency)
- traffic and transportation managers
- managers of the road network asset
- construction and maintenance personnel, who build and maintain asset components
- utility agencies using the road reserve for infrastructure (water, sewerage, gas, electricity, telecommunications)
- state and federal governments, who periodically provide funding for roads.

2.3 Coordinating & Responsible Road Authority

Section 35 of the *Road Management Act 2004* provides that a road authority has power to do all things necessary or convenient to be done for or in connection with the performance of its functions under the Act.

Section 36 of the *Road Management Act 2004* outlines which road authority is the coordinating road authority. According to subsection (c), the coordinating road authority:

If the road is a municipal road, the municipal council of the municipal district in which the road or part of the road is situated.

However, there are instances where several authorities are responsible for components of the road within the road reserve. Section 37 of the *Road Management Act 2004* identifies who is the responsible road authority in particular circumstances.

2.4 General Functions of a Road Authority

The general functions of a road authority are described within Section 34 of the *Road Management Act 2004*.

2.5 Rights of the Road User

The rights of public road users, which are legally enforceable, are set out in Sections 8 to 10 of the *Road Management Act 2004*.

2.6 Obligations of Road Users

2.6.1 General Usage

The common law requires that a road user must take reasonable care for their own safety (see *Ghantous v Hawkesbury City Council*)

The *Road Safety Act 1986* sets out obligations on road users, including section 17A which requires that a person who drives a motor vehicle on, or uses, a highway must drive in a safe manner have regard for all relevant factors, including without limiting their generality, the following:

- (a) physical characteristics of the road
- (b) prevailing weather conditions
- (c) level of visibility
- (d) the condition of any vehicle the person is driving or riding on the highway
- (e) prevailing traffic conditions
- (f) the relevant road laws and advisory signs
- (g) the physical and mental condition of the driver or road user.

Section 17A of the *Road Safety Act 1986* also requires that a road user must take reasonable care:

- (a) to avoid any conduct that may endanger the safety or welfare of other road users
- (b) to avoid any conduct that may damage road infrastructure and non-road infrastructure on the road reserve
- (c) to avoid conduct that may harm the environment of the road reserve

2.6.2 Incident Claims

If a person proposes to make a claim in relation to a public road or infrastructure for which Council is the responsible road authority, that person should contact Council, and Council will initiate the respective investigation and insurance reporting processes.

In accordance with Section 110 of the *Road Management Act 2004*, Council is not legally liable for property damages where the value of the damage is equal to or less than the threshold amount.

In cases where the claim relates to assets Council does not own or is not responsible for on the road reserve, the person who proposes to make a claim must refer the claim to the other authority or person responsible for those assets.

2.6.3 Permits for work within a road reserve

In cases where an individual or organisation proposes to carry out works within the road reserve that may impede public access, or interfere with road infrastructure, they must apply for a 'works within road reserve' permit. There are some exemptions, as noted in the *Road Management (Works and Infrastructure) Regulations 2015*.


Local laws also require property owners to apply for a vehicle crossing permit if they plan to build a driveway.

In both cases, a fee applies to cover the costs of the administration and inspection of the work.

2.6.4 Obligation of others

There are several assets within the road reserve that Council does not have an obligation to inspect and/or maintain. These include:

- **Non-road infrastructure** – This includes (but is not limited to) such items as gas pipes, water and sewerage pipes, cables, electricity poles and cables, tram wires, rail infrastructure, bus shelters, public telephones, mail boxes, roadside furniture and fences erected by utilities, or providers of public transport.
- **Vehicle driveways** – the vehicle crossing (including Cross-over), located between the carriageway and the property boundary, must be maintained by the adjoining property owner. However, Council is responsible for the portion of the driveway where the constructed pathway is reasonably required by the public in accordance with the following diagram:

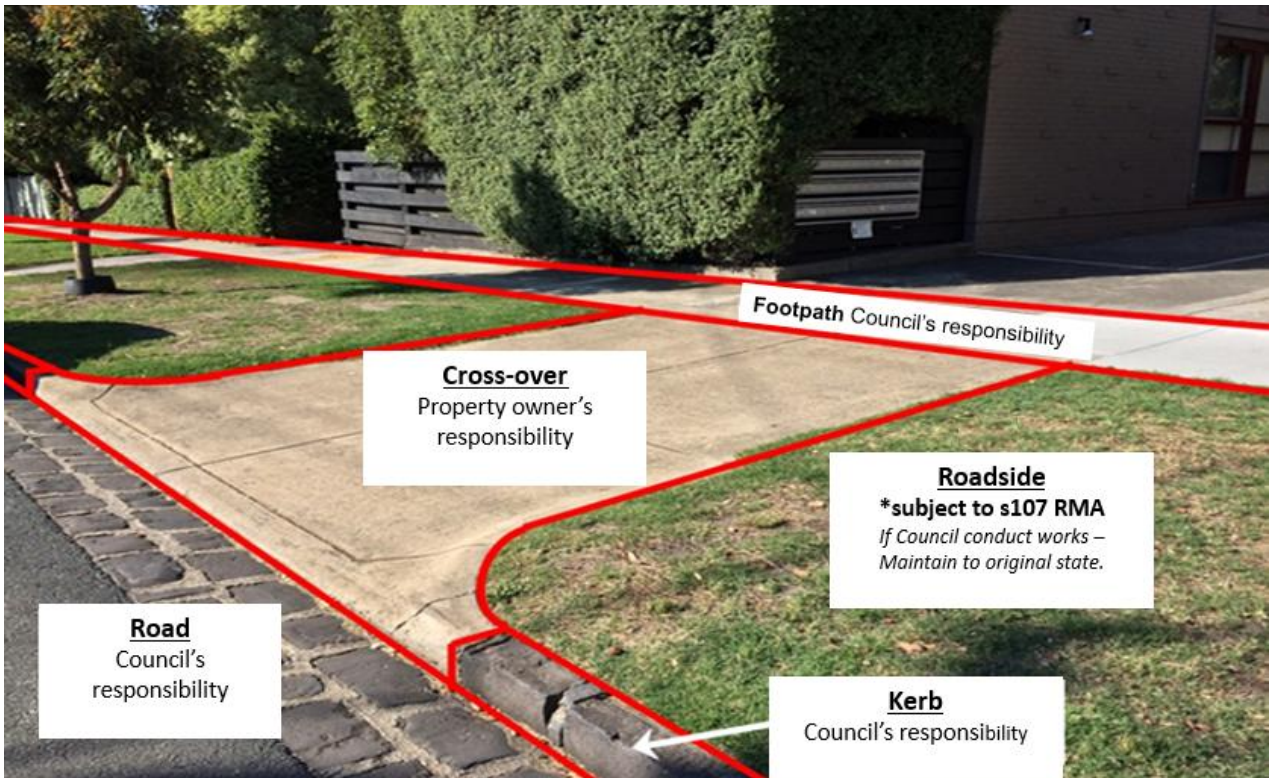

- **Single property stormwater drains** – for drains constructed within the reserve that carry water from a single property to an outlet in the kerb, or other drain.
- **Utilities** – including, but not limited to; telecommunication, power, water, gas and rail authority assets.
- **Roadside** – as per Section 107 of the *Road Management Act*, Council has no “statutory duty or a common law duty to perform road management functions in respect of a public highway which is not a public road or to maintain, inspect or repair the roadside”, described as “any land that is within the boundaries of the road (other than shoulders) which is not a roadway or pathway”. This includes landscaped tree plots within the footpath/pathway where the surface of the tree plot is not constructed with the intention of providing a trafficable pedestrian surface.

Where Council becomes aware of a hazard created by the defective condition of assets / infrastructure owned by another party, Council may at its absolute discretion:

- If located within assets / infrastructure for which Council is responsible (e.g. footpaths, road surfaces, etc.), or otherwise presents an immediate and significant risk to members of the public, undertake temporary measures to reduce the risk to members of the public until such time as the respective owner can implement permanent repairs (subject to Council's available resources).

- Report in writing (e.g. email or letter) the presence of the hazard to the responsible party and request that repairs be implemented within a reasonable timeframe.
- Where repairs are not completed by the responsible party within the respective timeframe, Council may complete necessary repairs and invoice the responsible party for the costs.

However, where another party has a duty in relation to the asset / infrastructure, and Council has a discretionary power to take remedial action in relation to that matter, only that other party with the duty is liable in a subsequent proceeding, in accordance with s.104 of the *Road Management Act 2004*.

3 Road Management Systems

3.1 Background and Process

Road asset management involves managing both physical assets, and uses and operation that have the potential to impact their condition. It applies to all road assets, including:

- the road – pavement and surface, as well as footpaths, kerb and channel
- structures – bridges, culverts and traffic management devices
- road infrastructure – traffic signals and on-road electrical assets.

The aim of our road management system is to deliver a safe and efficient road network and meet community needs to the best of our ability, within available resources.

To create a road asset management system that would best meet our needs when inspecting, maintaining and repairing public roads, we used the following nationally-recognised asset management frameworks:

- International Infrastructure Management Manual (IIMM) 2015, IPWEA
- IPWEA National Asset Management Systems (NAMS+)
- Other references, as listed in Technical References.

The system is designed to set the direction for our asset management activities. It is also linked to the annual business planning cycle.

3.2 Asset Hierarchies – Municipal Road Network

All roads and footpaths within the municipal road network are classified according to a hierarchy that takes into account how they are used, who uses them and how often.

The hierarchy classification is used to determine the levels of service required, prioritise works programs and determine defect intervention repairs.

The three levels in the hierarchy are:

1. **Urban road & street network**

Primarily designed to support the movement of vehicles, bicycles, and pedestrians within built-up areas and typically have lower speed limits than rural or highway roads due to higher traffic density, intersections, pedestrian activity, and the presence of buildings and infrastructure.

This is further divided into the following categories:

- Category 5: Arterial
- Category 4: Main distributor
- Category 3: Secondary distributor and collector
- Category 2: Local access
- Category 1: Access lane.

These hierarchies are also applied to associated Traffic Control Devices and Kerb and Channel

Shared zones are divided into the following categories:

- Category 3: High-use zones
- Category 2: Moderate-use zones
- Category 1: Other Pathways

Bicycle Lanes (including off street bicycle lanes) are divided into the following categories:

- Category 3: High-use lanes
- Category 2: Moderate use lanes

See Attachment 1 for more information.

2. **Rural road network**

The City of Yarra is not responsible for any Rural road network
See Attachment 2 for more information.

3. **Pathway network**

The footpath network is divided into 3 categories, as follows:

Footpaths

- Category 3: High-use Areas
- Category 2: Moderate-use Areas
- Category 1: Other Areas

See Attachment 3 for further information.

3.3 Our Road Network

More information about Council’s road network is shown in the tables below.

Table 1 - Road length by hierarchy - date last updated: 20 May 2025

Hierarchy	Length (km)	% of Network
Category 5: Arterial	0	0%
Category 4: Main Distributor	5	2%
Category 3: Secondary Distributor/collector	28	4%
Category 2: Local Access	190	32%
Category 1: Lane	94	23%
Total	318	100%

Table 2 - Road length by surface type - date last updated: 20 May 2025

Surface Type	Length (km)	% of Network
Sealed	318	100%
Unsealed	0	0%
Total	318	100%

3.4 Maintenance Management System

3.4.1 Maintenance Management

Council has responsibilities to all road users and the community to maintain public roads to a reasonably safe and suitable standard, within our available funds and resources. By developing long-term maintenance programs for our assets, we are better able to plan how we do this.

The following maintenance requirements shape our annual program and budget:

- **Routine maintenance standards**

Standards vary across the network depending on the asset type and relevant risk factors, such as traffic volumes and composition, operating speeds, the susceptibility of assets to deterioration and the cost effectiveness of repairs. Competing priorities for funding are also relevant.

Defect intervention levels have been established using the VicRoads Standard Specification Section 750 and adapting it to local conditions. The standards will be reviewed periodically to make sure they are adequate (see section 1.4).

- **Repair and maintenance works**

Works must be completed within a specified time, depending on the severity and location of the defect. Response times are determined using local knowledge and experience and past

performance as a guide.

Response times are monitored and will be periodically reviewed (see section 1.4).

- **Temporary mitigation measures**

These are temporary works designed to reduce the risk of an incident, until such time as repair or maintenance works can be completed.

Response times and safety measures – for example warning signs, flashing lights, and safety barriers – are determined by reference to the risk to safety, road type and traffic volume.

- **Emergency works**

Works that result from emergency incidents and must be undertaken immediately, for the safety of road users and the public.

Emergency works might include traffic incident management, responses to fires, floods, storms and spillages, and any assistance required under the Victorian State Emergency Response Plan and Municipal Emergency Management Plan.

3.4.2 Asset Management Plans

Our asset management plans guide the development of long-term asset renewal programs, helping us to plan and finance asset renewal and replacement.

3.4.3 Maintenance Surveys and inspections

A four-tier regime is used to inspect our road network assets. It covers safety issues, incidents, defects and condition inspections.

1. **Reactive inspections (Request for Service or RFS)**

These inspections are conducted in response to requests from the community. The inspection is carried out by a Council employee and assessed according to the Hazard intervention levels, contained within Attachment 6.

2. **Proactive Inspections**

Regular timetabled inspections that are scheduled depending on traffic flow, the types of defects likely to impact the asset and the perceived risks of these defects.

3. **Condition Inspections**

These inspections identify structural integrity issues which, if untreated, are likely to adversely affect the network overall. These issues may impact short-term serviceability, as well as the ability of the asset to perform for the duration of its intended life span. These inspections are carried out in accordance with the Council's asset management plans. They are undertaken by contractors on a four yearly schedule.

3.4.4 Maintenance responsiveness and performance targets

The following information is recorded when we receive a Request for Service (RFS) from the community:

- Date the request was received
- Details of the request, including the location and nature of the reported hazard/defect (including any specific measurements if provided), name of the person making the request, copies of any photographs provided, etc.
- The personnel / department to which the request has been assigned for action
- Date by which the request must be actioned (based on the target response times specified in Attachment 6)
- Date when the request was actioned and/or completed (this typically involves someone carrying out an RFS inspection, as described in section 3.4.3, followed by any necessary repair works conducted).

By recording this information, we can monitor compliance against target response times – that is, the time it takes from receiving a request to carrying out an inspection and ultimately completing necessary works.

Customer requests will be inspected and assessed in accordance with timeframes specified in Attachment 6. Following are some possible outcomes from a reactive inspection:

- If a defect identified exceeds a Description / Intervention level specified in Attachment 6, a work order would be created with a date for completion of works in line with respective specified repair timeframes from the time the defect is inspected & identified.
- If repairs are significant – for example, rehabilitation works are required – temporary mitigation measures may be undertaken to reduce the risk posed by the hazard/defect until the proper works can be undertaken (and subject to available resources).
- If the defect is assessed as below the Description / Intervention Level specified in Attachment 6, it would be noted (including why), but no remedial action will be conducted.

In all cases, the action taken would be noted against the original request.

Target response times and intervention times are based on ‘normal’ conditions. The same level of service would not apply in cases where the Plan has been suspended, under Section 1.5.

3.5 Asset Levels of Service

Five elements are taken into account when determining appropriate levels of service for the road network. These are:

- Community expectations;
- Technical standards;
- Organisational capacity;
- Performance measures and targets;
- Safety of road and footpath users.

4 Register of Public Roads

Council maintains a register of public roads – called the Register of Public Roads – with the details of all public roads and ancillary areas for which we are responsible.

The Register of Public Roads is available on Council’s website. A hard copy is made available at our Customer Service Centre, Richmond Town Hall 333 Bridge Rd, Richmond, upon request.

4.1 Maintenance Demarcation (Boundary) Agreements

Where there are boundary agreements between us and other road authorities or private organisations, the schedule of roads affected, and agreements are listed in the Municipal Road Register.

We have agreements with the following authorities:

4.1.1 Metro Trains Melbourne

Interface Agreements for level crossings and grade separated interfaces located within Yarra municipality boundary are maintained by the rail authority Metro Trains Melbourne, and detail the responsibilities of the relevant road managers (Yarra City Council and/or DoT (VicRoads)) at each interface.

4.1.2 Freeways and Arterial Roads

Classification of a road as a freeway or an arterial road is declared by Department of Transport and Planning (DoT) in accordance with section 14 of the Act. DoT is both the coordinating road authority and the responsible road authority for freeways and arterial roads.

In the case of arterial roads, the responsibilities of council are defined by the *Code of Practice Operational Responsibilities for Public Roads*

4.1.3 Local Roads with Tram Lines

Where tram tracks exist, the tram operator is responsible for tram-related assets in the road reservation such as tram tracks, yellow line marking, cat-eyes, overhead power lines and shelters. Tram operators are also responsible for the tram track reserve area typically within 500mm each side of the outer track rails in road reserves including crib crossings installed to protect pedestrians crossing tram tracks.

Council is responsible for the road reserve outside these limits.

4.1.4 Shared Roads

Shared roads are those that may define boundaries with other municipalities. In most cases the adjoining municipalities are responsible for managing half of the road, depending on the boundary alignment.

Whilst the City of Yarra shares boundaries with six other municipalities, it has shared roads only with the cities of Melbourne and Merri-bek

4.1.5 Bridges & Major Culverts

Yarra City Council is not responsible for any bridge structures within the road reserve, but is responsible for the maintenance of road-related assets on the bridges as indicated. These are maintained based on the type of asset.

- Footbridges in Road reserve – no responsibility
- Arterial Road Bridges over watercourses – Footpath only (to municipal boundary)
- Local Road Bridges over Rail – Road Pavement and footpath
- Arterial road bridges over rail – Footpath only (typically)

4.2 Roads not listed on the Register

The following roads are not listed on our Register of Public Roads:

- Roads which are the full responsibility of the state government, or a private enterprise;
- Unused roads for which we have not accepted responsibility;
- Roads drawn out on a plan of subdivision, until such time that we accept responsibility for these roads;
- Roads which we have not determined are reasonably required for general public use.

Technical References

- i. AS ISO 31000:2018 – Risk Management – Guidelines
- ii. Infrastructure Design Manual (IDM) version 5.40 – Road Classification
- iii. Integrated Asset Management Guidelines for Road Networks (AP-R202) 2002, Austroads Inc.
- iv. International Infrastructure Management Manual (IIMM) 2015, IPWEA
- v. VicRoads Risk Management Guidelines
- vi. VicRoads Standard Specification Section 750 – Routine Maintenance

Attachment 1: Hierarchy – Roads & Bicycle Lanes

Road Hierarchy

Category	Type	Description*
Category 5	Arterial	<p>These are widely used hard surface formation roads which are major connectors between:</p> <ul style="list-style-type: none"> • Freeways and/or National Highways, and/or • Major centres, and/or key towns, or • Have major tourist importance or <p>Which main function is to form the principal avenue of communication for metropolitan traffic movements, not catered for by freeways.</p>
Category 4	Main Distributor	<p>These carry heavy volumes of traffic, including commercial vehicles, and act as main routes for traffic flows in and around the municipality. Key features typically include:</p> <ul style="list-style-type: none"> • Supplementary to arterial road system • Connector between arterial roads and lower order streets • Cater for, but may restrain, service and heavy vehicles • Provide access to significant public services • Minimum two clear traffic lanes (excluding parking)
Category 3	Secondary Distributor/ Collector	<p>These carry significant volumes of traffic and provide access, by linking residential areas to arterial roads. They also provide links between the various collector roads. Key features typically include:</p> <ul style="list-style-type: none"> • Non-continuous connector (do not cross arterial roads) • Limited through traffic (not promoted, or encouraged) • Cater for, but may restrain, service and heavy vehicles • Minimum two clear traffic lanes (excluding parking)
Category 2	Local Access	<p>These carry only local traffic. The primary function is to provide access to private properties. Key features typically include:</p> <ul style="list-style-type: none"> • Short distance travel to higher level roads • Minimum one clear traffic lane (excluding parking)
Category 1	Lane	<p>These perform a very minimal function as local access roads. Key features typically include:</p> <ul style="list-style-type: none"> • A side or rear entry lane, generally providing secondary access to properties • Low traffic counts

Shared Zones Hierarchy

Category	Type	Description*
Category 3	High-use zone	The category of 'highest use' that includes zones used by high volumes of pedestrian and vehicular traffic <ul style="list-style-type: none"> • Rose St, Fitzroy
Category 2	Moderate-use zone	Shared zones with moderate use <ul style="list-style-type: none"> • St Heliers St • Robert St • Walnut St • Young St • Lennox St • Little Buckingham St • Gibbons S • Steward St • Shamrock St
Category 1	Other zones	This category includes all other shared zones.

Bicycle Lane Hierarchy

Category	Type	Description*
Category 3	High-use Lanes	Bicycle lanes with the highest use including but not limited to <ul style="list-style-type: none"> • Protected bicycle lanes • Separated bicycle lanes • Delineated/ buffered and conventional bicycle lanes with high use
Category 2	Moderate-use Lanes	All other delineated bicycle lanes

Attachment 2: Road Hierarchy – Rural Roads

Yarra City Council does not have any roads classified as Rural Roads

Attachment 3: Pathway Hierarchy

Footpath Hierarchy

Category	Type	Description*
Category 3	High-use Areas	The category of 'highest use' that includes all footpaths in: <ul style="list-style-type: none">• Central Business District(s)• select tourist areas• select shopping precincts• select high-activity areas• Hospital zones
Category 2	Moderate-use Areas	This category includes shopping strips, and other pedestrian generators including: <ul style="list-style-type: none">• Shopping strips• Schools• Select railway stations• Select public transport areas
Category 1	Other Areas	This category includes all other pathways within road reserves, including: <ul style="list-style-type: none">• Residential areas• Commercial areas• Industrial areas

Attachment 4: Inspection Requirements

Inspection Type	Purpose	Inspection and Reporting Requirements
Reactive – Request for Service (RFS)	<p>Reactive inspections are designed to confirm the nature of defects/hazards reported by members of the public or Council employees, and identify any that exceed the intervention levels specified in Attachment 6.</p>	<p>Performed by a Council representative with knowledge of Description / Intervention Levels (Attachment 6) and road maintenance techniques who may then call in a higher level of expertise if necessary.</p> <p>All Reactive inspections are conducted on foot, with defects/hazards photographed and details stored in the Asset Register.</p> <p>The report is required to identify specific safety defect, time first reported, time inspected and by whom, subsequent action and time of completion.</p>
Proactive Inspection	<p>Inspection undertaken in accordance with a formal programmed inspection schedule to determine if the road asset complies with the levels of service as specified.</p> <p>A record of each asset is to be completed detailing the name of the inspector, the inspection date, and a description of any defects found that exceed the intervention levels specified in Attachment 6.</p> <p>In addition, details of the inspection will be electronically recorded against the particular asset inspected.</p>	<p>Proactive Inspections of roads are conducted via a slow moving vehicle, while Proactive Inspections of all other asset types are conducted on foot, with defects/hazards photographed and details stored in the Asset Register.</p> <p>Performed by a dedicated Plan inspector.</p>

Attachment 5: Inspection Schedules

Asset Group	Hierarchy Category	Reactive Inspection Timeframe	Proactive Inspection Frequency
Sealed Roads, Regulatory, Warning and Hazard Signs	Category 4	3 WD	13 M
	Category 3	3 WD	13 M
	Category 2	3 WD	26 M
	Category 1	3 WD	39 M
Footpaths, Kerb & Channel	Category 3	3 WD	7 M
	Category 2	3 WD	13 M
	Category 1	3 WD	26 M
Shared Zones	Category 3	3 WD	13 M
	Category 2	3 WD	26 M
	Category 1	3 WD	26 M
Bicycle lanes/ pathways	Category 3	3 WD	13 M
	Category 2	3 WD	39 M (completed during sealed road inspection)
Emergency Response – All Asset / Categories		1 H	n/a
<p>Reported Incidents / Hazards that present an immediate and significant risk to members of the public.</p> <p>Temporary measures (e.g. installing barriers, signage, closing the road/footpath, etc.) will be implemented to reduce the risk to users of the road network until such time as appropriate repairs can be completed.</p>			

Notes

- H = Hours, WD = Working Days, W = Weeks, M = Months
- If a Proactive Inspection Frequency elapses on a Weekend or Public Holiday, the actual due date will be the next Working Day.

Attachment 6: Defect Intervention Levels and Repair Timeframes

Sealed Roads

Defect type	Description / Intervention Level	Repair timeframes by hierarchy ¹			
		Cat 4	Cat 3	Cat 2	Cat 1
Pothole	Potholes in sealed pavement >70 mm in depth and >300 mm in diameter	10 WD	15 WD	20 WD	20 WD
Depressions / deformations	Depression / deformations in the traffic lane of a sealed pavement >75 mm in depth under a 3m long straight edge. Tree root related depression / deformations in the traffic lane of a sealed pavement >150 mm in depth under a 3m long straight edge.	5 WD	10 WD	15 WD	20 WD
Missing pit lids	Missing Council drainage pit lids	2 WD	2 WD	2 WD	2 WD
Damaged pit lids	Damaged Council drainage pit lids (such that they are potentially structurally unsound).	2 WD	3 WD	3 WD	12 WD
Roadside Vegetation – Overhead clearance	Vegetation intruding into the road envelope: <ul style="list-style-type: none"> • <4.5 m over the trafficable portion of Cat 4 & 3 roads • <4.0 m over the trafficable portion of Cat 2 & 1 roads 	25 WD	25 WD	45 WD	45 WD
Roadside Vegetation – Obstructing sightlines	Vegetation that is obstructing sightlines to intersections or regulatory, warning and hazard signs when viewed from the following distances: <ul style="list-style-type: none"> • Speed Limit – ≤ 50km/h = 150m • Speed Limit – ≥ 60km/h = 150m 	8 W	8 W	2 M	2 M

¹ H = Hours, WD = Working Days, W = Weeks, M = Months, If a Proactive Inspection Frequency elapses on a Weekend or Public Holiday, the actual due date will be the next Working Day.

Traffic Control Devices

Defect type	Description / Intervention Level	Repair timeframes by hierarchy ²			
		Cat 4	Cat 3	Cat 2	Cat 1
Missing / Damaged Signage	Regulatory, warning and hazard signs missing, illegible or damaged making them substantially ineffective when viewed from the following distances: <ul style="list-style-type: none"> • Speed Limit – <=50km/h = 150m • Speed Limit – 60km/h = 150m 	1 W	1 W	2 W	3 W
Missing / Damaged Guard Rail or fencing	Guard rail/fence damaged or missing making them substantially ineffective	12 W	12 W	6 M	12 M
Missing / Damaged Pavement Markings	Pavement markings which are missing or faded making them substantially ineffective	12 W	12 W	6 M	12 M

² H = Hours, WD = Working Days, W = Weeks, M = Months, If a Proactive Inspection Frequency elapses on a Weekend or Public Holiday, the actual due date will be the next Working Day.

Shared Zones

Defect type	Description / Intervention Level	Repair timeframes by hierarchy ³		
		Cat 3	Cat 2	Cat 1
Vertical Displacement	Vertical Displacement >30 mm in height. Vertical displacement due to Tree roots >150mm (≥1m from edge of tree trunk).	2 W	3 W	4 W
Loose segmented pavers	Loose and unstable segmented pavers (i.e. bluestone, bricks, etc.) that move underfoot	2 W	3 W	4 W
Cracking	Cracking perpendicular to path of travel >40 mm wide Longitudinal cracking >40 mm wide	4 W	6 W	8 W
Undulations	Undulations (depressions/bumps) >70 mm in depth/height under a 1.5m straight edge. Undulations due to Tree roots – depth/height >150mm under a 1.5m straight edge (≥1m from edge of tree trunk).	3 W	4 W	5 W
Dislodged / missing pieces / potholes	Dislodged or missing pieces or potholes >200 mm in length/width and >30 mm in depth	2 W	3 W	4 W
Missing pit lids	Missing Council drainage pit lids	2 WD	2 WD	2 WD
Damaged pit lids	Damaged Council drainage pit lids (such that they are potentially structurally unsound)	2 W	2 W	2 W
Vegetation overhead clearance	Vegetation intruding into the pathway envelope: <3.0 m over shared pathway surface and >100 cm beyond each edge	10 W	10 W	10 W

³ H = Hours, WD = Working Days, W = Weeks, M = Months, If a Proactive Inspection Frequency elapses on a Weekend or Public Holiday, the actual due date will be the next Working Day.

Defect type	Description / Intervention Level	Repair timeframes by hierarchy ³		
		Cat 3	Cat 2	Cat 1
Vegetation – Obstructing sightlines	Vegetation that is obstructing sightlines to intersections or regulatory, warning and hazard signs when viewed from <40 m	10 W	10 W	10 W
Dislodged / missing tactile indicator	Damaged or missing	4 W	4 W	2 M

Bicycle Lanes

Defect type	Description / Intervention Level	Repair timeframes by hierarchy ⁴		
		Cat 3	Cat 2	Cat 1
Vertical Displacement	Vertical Displacement >30 mm in height. Vertical displacement due to Tree roots >150mm (≥1m from edge of tree trunk).	2 W	4 W	5 W
Cracking	Cracking perpendicular to path of travel >40 mm wide Longitudinal cracking >40 mm wide	4 W	6 W	8 W
Undulations	Undulations (depressions/bumps) >70 mm in depth/height under a 1.5m straight edge. Undulations due to Tree roots – depth/height >150mm under a 1.5m straight edge (≥1m from edge of tree trunk).	3 W	6 W	5 W
Dislodged / missing pieces / potholes	Dislodged or missing pieces or potholes >200 mm in length/width and >30 mm in depth	3 W	6 W	5 W
Missing pit lids	Missing Council drainage pit lids	2 WD	2 WD	2 WD
Damaged pit lids	Damaged Council drainage pit lids (such that they are potentially structurally unsound)	2 W	2 W	3 W
Vegetation overhead clearance	Vegetation intruding into the pathway envelope: <3.0 m over shared pathway surface and >100 cm beyond each edge	10 W	10 W	10 W
Vegetation – Obstructing sightlines	Vegetation that is obstructing sightlines to intersections or regulatory, warning and hazard signs when viewed from <40 m	10 W	10 W	10 W

⁴ H = Hours, WD = Working Days, W = Weeks, M = Months, If a Proactive Inspection Frequency elapses on a Weekend or Public Holiday, the actual due date will be the next Working Day.

Kerb and Channel

Defect type	Description / Intervention Level	Repair timeframes by hierarchy ⁵			
		Cat 4	Cat 3	Cat 2	Cat 1
Vertical Displacement	Vertical displacement – uplift section >50 mm <ul style="list-style-type: none"> • Tree root caused vertical displacement – uplift section >150mm (located outside of tree base area) 	3 W	3 W	4 W	5 W
Horizontal Displacement	Horizontal displacement section >50 mm. <ul style="list-style-type: none"> • Tree root caused horizontal displacement – displacement section >150mm (located outside of tree base area) 	3 W	3 W	4 W	5 W

⁵ H = Hours, WD = Working Days, W = Weeks, M = Months, If a Proactive Inspection Frequency elapses on a Weekend or Public Holiday, the actual due date will be the next Working Day.

Footpaths

Defect type	Description / Intervention Level	Repair timeframes by hierarchy ⁶		
		Cat 3	Cat 2	Cat 1
Vertical Displacement	Vertical Displacement >30 mm in height. Vertical displacement due to Tree roots >150mm (≥1m from edge of tree trunk).	2 W	3 W	4 W
Loose segmented pavers	Loose and unstable segmented pavers (i.e. bluestone, bricks, etc.) that move underfoot	2 W	3 W	4 W
Cracking	Cracking in footpaths >40 mm wide	4 W	6 W	8 W
Undulations	Undulations (depressions / bumps) >70 mm in depth/height under a 1.5m straight edge. Undulations due to Tree roots – depth/height >150mm under a 1.5m straight edge (≥1m from edge of tree trunk).	3 W	4 W	5 W
Dislodged / missing pieces / potholes	Dislodged or missing pieces or potholes >200 mm in length/width and >30 mm in depth	2 W	3 W	4 W
Missing pit lids	Missing Council drainage pit lids	2 WD	2 WD	2 WD
Damaged pit lids	Damaged Council drainage pit lids (such that they are potentially structurally unsound)	2 W	2 W	2 W
Vegetation overhead clearance	Vegetation intruding into the footpath envelope: <2.5 m over footpath surface	10 W	10 W	10 W
Dislodged / missing tactile indicator	Damaged or missing	4 W	4 W	2 M

⁶ H = Hours, WD = Working Days, W = Weeks, M = Months, If a Proactive Inspection Frequency elapses on a Weekend or Public Holiday, the actual due date will be the next Working Day.